




Fiberglass & Aquaculture
Solutions


DRUMFILTER

Your Solution Partner in All Industrial and Agricultural Projects!

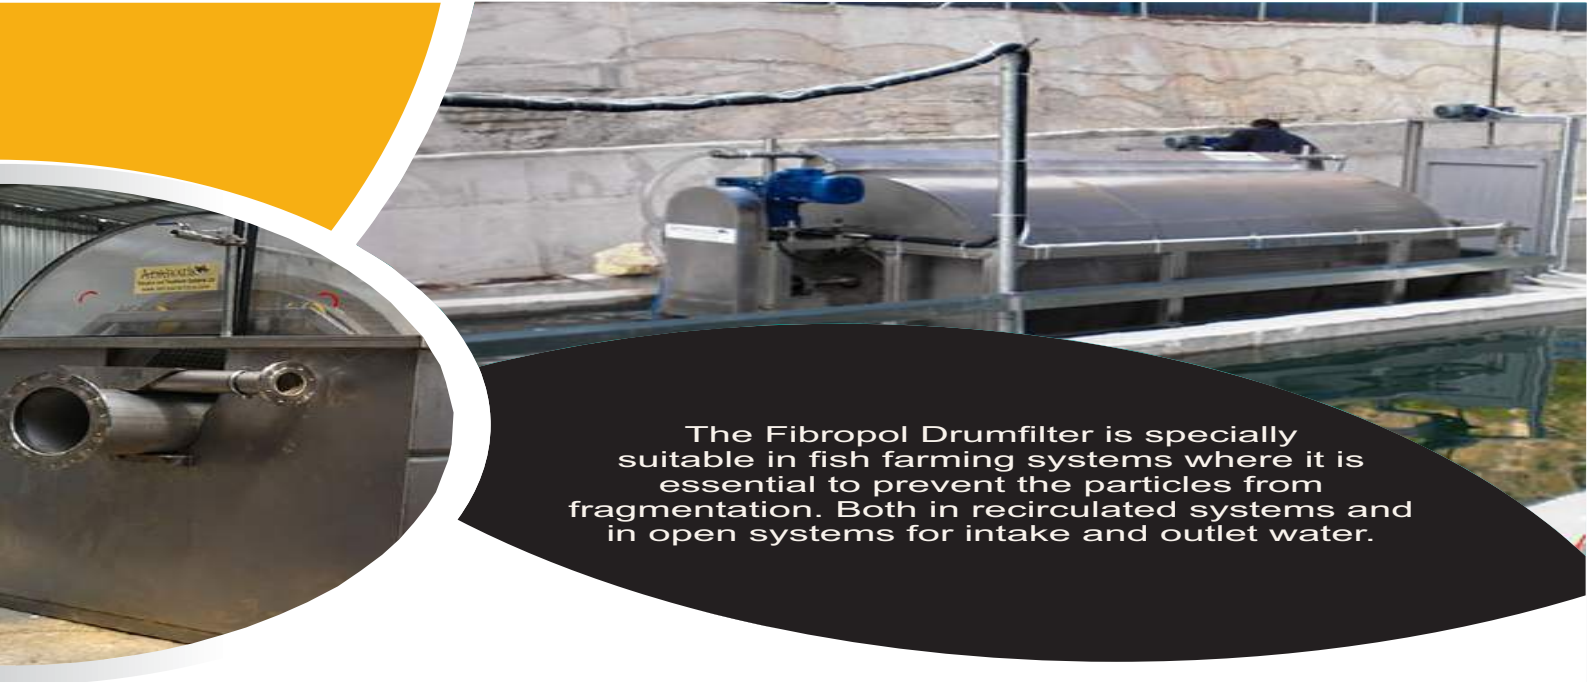

Dimensions

TYPE	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	M mm	Weight kg
501	420	670	790	470		40	190	75	110	450	110	0	120	70
801	700	960	980	508		80	230	100	200	550	110	100	120	120
802	1110	960	980	508		80	230	100	250	550	110	100	120	170
803	1520	960	980	508		80	230	100	250	550	110	100	120	220
1201	845	1500	1500	780	620	80	325	267	200	810	110	140	120	290
1202	1265	1500	1500	780	620	80	325	292	250	810	110	140	120	350
1203	1685	1500	1500	780	620	80	325	325	315	810	110	140	120	410
1601	895	1870	1820	1000	380	80	325	320	250	1080	110	330	120	520
1602	1315	1870	1820	1000	380	80	325	352	315	1080	110	330	120	620
1603	1735	1870	1820	1000	380	80	325	395	400	1080	110	330	120	730
1604	2155	1870	1820	1000	380	80	325	445	500	1080	110	330	120	830
1605	2595	1870	1820	1000	380	80	325	445	500	1080	110	330	120	1020
1606	3015	1870	1820	1000	380	80	325	445	500	1080	110	330	120	1130
1607	3435	1870	1740	1000	380	80	325	445	500	1080	110	330	120	1250
2005	2815	2360	2250	1180	470	80	340	535	630	1400	160	450	120	1400
2006	3235	2360	2250	1180	470	80	340	535	630	1400	160	450	120	1600
2007	3655	2360	2250	1180	470	80	340	535	630	1400	160	450	120	1750

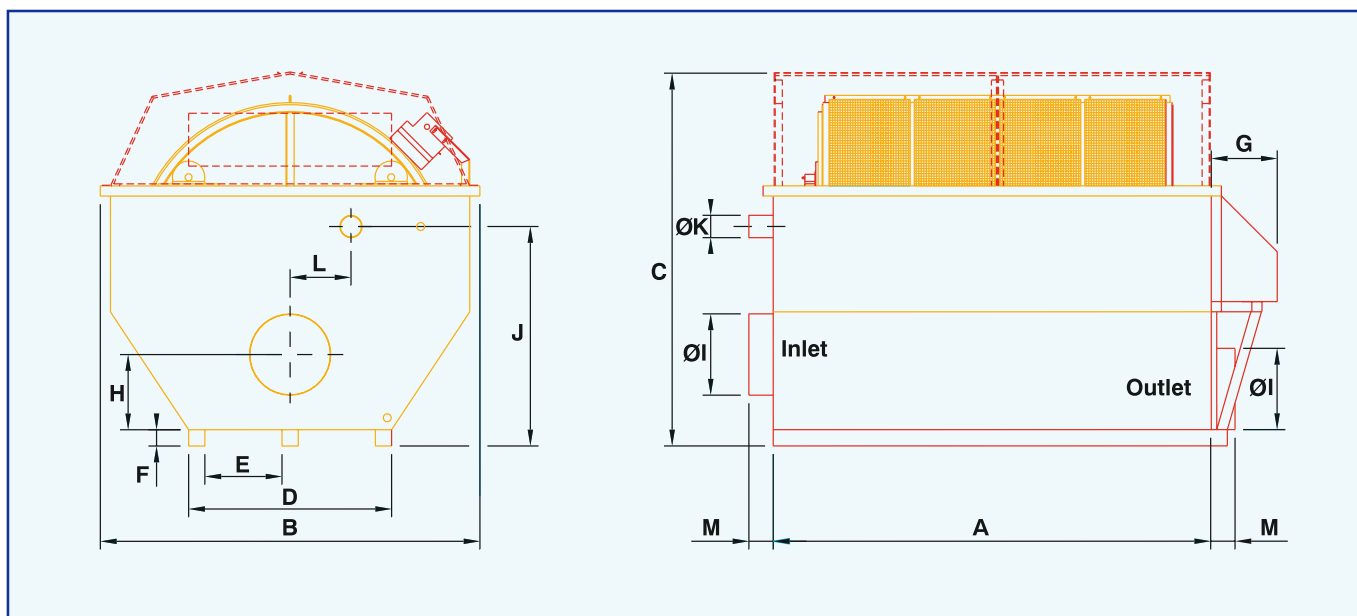



The Fibropol Drumfilter is specially suitable in fish farming systems where it is essential to prevent the particles from fragmentation. Both in recirculated systems and in open systems for intake and outlet water.

01

Type of Treatment

Disposal of solid materials in suspension in liquids by filtration.

Resistant to sea water
Super durability against corrosion
Continuous filtration
Does not require any pressure
Atmospheric pressure filtration
Less water loss
Easy and rapid filtration
Filtration of 25 microns-3000 microns
SS 304, SS 316 stainless steel and polypropylene-manufactured

04

Technical Specifications

Capacity (m³/h): Untill to 4500 m³/h
Filtration Degrees: 25-3000 microns
Consumed Water of Cleaning: Less than 1% of capacity
Min. Working Pressure: Atmospheric pressure
Body Material: ss304stainless steel, ss316stainless steel, Polypropylene
Screen Material: ss304 stainless steel, ss316 Stainless steel, Polypropylene
Electrical Control System: Automatic Electrical Control System





sales@fibropol.com



www.fibropol.com



Your Solution Partner in All
Industrial and Agricultural Projects!